


## Coating Data Sheet

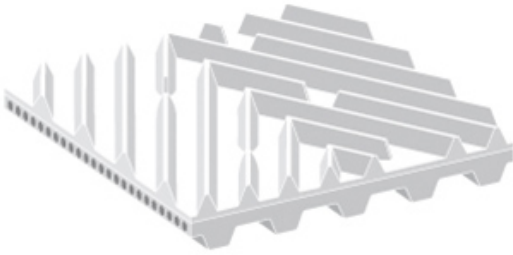

### Designation

Coating type description OLD	V/20/FG; FG
Coating type description NEW	PVC 65/FG

### Design

Coating Material	PVC
Colour	White
Surface pattern	Herringbone profile

### Technical data

Hardness [Shore(A)]	65
Density [kg/m <sup>3</sup> ]	
Coating thickness min. [mm]	3.0
Coating thickness max. [mm]	3.0
d factor *	30
Minimum pulley diameter $D_{min}$ (approx.) [mm]	[d factor] x [selected belt thickness]
Minimum operating temperature [°C]	-10
Maximum operating temperature [°C]	80

### Coefficient of static friction

against PE foil	0.34
against wood	0.49
against sheet glass	0.70
against cardboard	0.46
against aluminium	0.58
against steel sheet	0.45

## Coating Data Sheet

### Properties

Electrostatic properties	non-conductive
Wear resistance	medium
Compressibility	No
Product release properties	medium
Cleanability	effortful

### Food properties

FDA 21CFR	Qualified for the transport of unpacked Food in compliance with FDA guideline 21CFR
-----------	---

### Chemical resistance

General chemical resistance to	Acids, salts & bases
--------------------------------	----------------------

### Special Fabrication

Sanding	No
Milling	No
Punching	Yes

### Applications

Food packaging, Pharmaceutical industry, Glass conveying

### General remarks

Food grade. Special Herringbone profile.