


## Coating Data Sheet

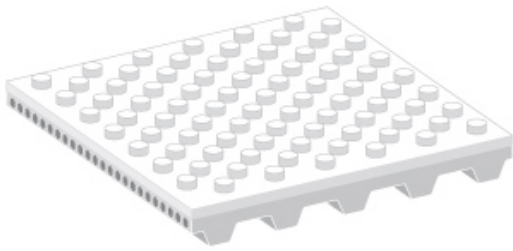

### Designation

Coating type description OLD	Pimple top
Coating type description NEW	PVC 65/Pimple

### Design

Coating Material	PVC
Colour	White
Surface pattern	Pimple top profile

### Technical data

Hardness [Shore(A)]	65
Density [kg/m <sup>3</sup> ]	
Coating thickness min. [mm]	2.5
Coating thickness max. [mm]	2.5
d factor *	20
Minimum pulley diameter D <sub>min</sub> (approx.) [mm]	[d factor] x [selected coating thickness]
Minimum operating temperature [°C]	-10
Maximum operating temperature [°C]	80

### Coefficient of static friction

against PE foil	0.37
against wood	0.51
against sheet glass	0.78
against cardboard	0.46
against aluminium	0.47
against steel sheet	0.92

## Coating Data Sheet

### Properties

Electrostatic properties	non-conductive
Wear resistance	medium
Compressibility	No
Product release properties	medium
Cleanability	effortful

### Chemical resistance

General chemical resistance to	Acids, salts & bases
--------------------------------	----------------------

### Special Fabrication

Sanding	No
Milling	No
Punching	Yes

### Applications

Food packaging, Pharmaceutical industry

### General remarks

Special pimple top profile.