


## Coating Data Sheet

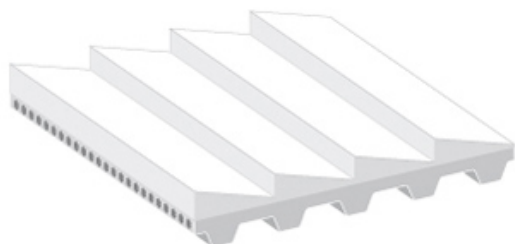

### Designation

Coating type description OLD	Saw profile
Coating type description NEW	PVC 65/Saw

### Design

Coating Material	PVC
Colour	White
Surface pattern	Saw tooth profile

### Technical data

Hardness [Shore(A)]	65
Density [kg/m <sup>3</sup> ]	
Coating thickness min. [mm]	3.0
Coating thickness max. [mm]	3.0
d factor *	25
Minimum pulley diameter D <sub>min</sub> (approx.) [mm]	[d factor] x [selected coating thickness]
Minimum operating temperature [°C]	-10
Maximum operating temperature [°C]	80

### Coefficient of static friction

against PE foil	0.28
against wood	0.49
against sheet glass	0.71
against cardboard	0.29
against aluminium	0.54
against steel sheet	0.65

## Coating Data Sheet

### Properties

Electrostatic properties	non-conductive
Wear resistance	medium
Compressibility	No
Product release properties	medium
Cleanability	effortful

### Chemical resistance

General chemical resistance to	Acids, salts & bases
--------------------------------	----------------------

### Special Fabrication

Sanding	No
Milling	No
Punching	Yes

### Applications

Pharmaceutical industry, Wood conveying, Metal parts conveying,  
General conveying

### General remarks

Special saw tooth profile.