


Coating Data Sheet

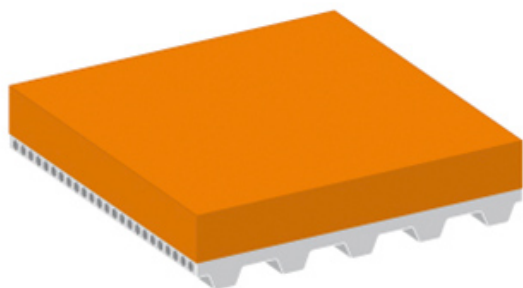

Designation

Coating type description OLD	Linatrilite
Coating type description NEW	Linatrilite

Design

Coating Material	Nitrile rubber (NBR)
Colour	Orange
Surface pattern	Smooth (sanded)

Technical data

Hardness [Shore(A)]	55
Density [kg/m ³]	
Coating thickness min. [mm]	3.0
Coating thickness max. [mm]	12.0
d factor *	25
Minimum pulley diameter D _{min} (approx.) [mm]	[d factor] x [selected belt thickness]
Minimum operating temperature [°C]	-20
Maximum operating temperature [°C]	110

Coefficient of static friction

against PE foil	0.90
against wood	0.99
against sheet glass	1.27
against cardboard	0.81
against aluminium	1.07
against steel sheet	1.13

Coating Data Sheet

Properties

Electrostatic properties	non-conductive
Wear resistance	medium
Compressibility	No
Product release properties	medium
Cleanability	good

Chemical resistance

General chemical resistance to	Generic fats and oils
--------------------------------	-----------------------

Special Fabrication

Sanding	Yes
Milling	Yes
Punching	Yes

Applications

Wood conveying, Feeder & haul-off belts
in cable industry

General remarks

High elasticity. Constantly high friction. Temperature range limited by PU timing belt material.