


## Coating Data Sheet

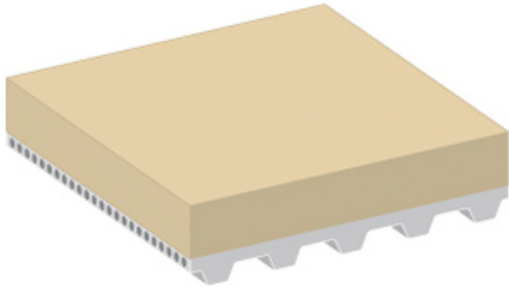

### Designation

Coating type description OLD	Correx
Coating type description NEW	Correx

### Design

Coating Material	Natural rubber
Colour	Beige
Surface pattern	Smooth (sanded)

### Technical data

Hardness [Shore(A)]	40
Density [kg/m <sup>3</sup> ]	
Coating thickness min. [mm]	4.0
Coating thickness max. [mm]	10.0
d factor *	20
Minimum pulley diameter D <sub>min</sub> (approx.) [mm]	[d factor] x [selected coating thickness]
Minimum operating temperature [°C]	-20
Maximum operating temperature [°C]	80

### Coefficient of static friction

against PE foil	1.15
against wood	1.10
against sheet glass	1.18
against cardboard	1.08
against aluminium	1.53
against steel sheet	1.49

## Coating Data Sheet

### Properties

Electrostatic properties	non-conductive
Wear resistance	medium
Compressibility	No
Product release properties	medium
Cleanability	good

### Chemical resistance

General chemical resistance to	Generic fats and oils
--------------------------------	-----------------------

### Special Fabrication

Sanding	Yes
Milling	Yes
Punching	Yes

### Applications

General conveying

### General remarks

Natural rubber. High friction and abrasion resistant.